

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200195132 B2**  
**(10) Patent No. 757981**

(54) Title  
Automatic analysis in virtual endoscopy

(51)<sup>6</sup> International Patent Classification(s)  
G06T 017/20

(21) Application No: 200195132 (22) Application Date: 2001 . 11 . 29

(43) Publication Date : 2002 . 01 . 17

(43) Publication Journal Date : 2002 . 01 . 17

(44) Accepted Journal Date : 2003 . 03 . 13

(62) Divisional of:  
199861804

(71) Applicant(s)  
Wake Forest University

(72) Inventor(s)  
David J Vining; Gordon W Hunt; David K. Ahn; David R.  
Stelts ; Paul F. Hemler; Tiffany W. Salido; Yaorong Ge

(74) Agent/Attorney  
DAVIES COLLISON CAVE,GPO Box 3876,SYDNEY NSW 2001

(56) Related Art  
US 5295488  
US 5283837  
US 5229935

## ABSTRACT

A computer system and a computer-implemented method are provided for interactively  
5 displaying a three-dimensional rendering of a structure having a lumen and for indicating  
regions of abnormal wall structure. A three-dimensional volume of data is formed from a  
series of two-dimensional images representing at least one physical property associated  
with the three-dimensional structure. An isosurface of a selected region of interest is  
10 isosurface is generated by the computer wherein the wireframe model includes a plurality  
of vertices. The vertices of the wireframe model are then grouped into populations of  
contiguous vertices having a characteristic indicating abnormal wall structure by the  
computer. The wireframe model is then rendered by the computer in an interactive three-  
dimensional display to indicate the populations of abnormal wall structure.



Our Ref:7661170

P/00/011  
Regulation 3:2

AUSTRALIA

Patents Act 1990

**ORIGINAL  
COMPLETE SPECIFICATION  
STANDARD PATENT**

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208

## AUTOMATIC ANALYSIS IN VIRTUAL ENDOSCOPY

### RELATED APPLICATION

- 5 This application is a continuation-in-part of application Ser. No. 08/331,352 now abandoned, entitled "Method and System for Producing Interactive, Three-Dimensional Renderings of Selected Body Organs Having Hollow Lumens to Enable Simulated Movement Through the Lumen", filed on Oct. 27, 1994, now U.S. Pat. No. 5,782,762, which is incorporated herein by reference.

10

### FIELD OF THE INVENTION

The present invention relates to a system and method for interactively displaying a three-dimensional rendering of a structure having a lumen and, more particularly, to a system and method for automatically analyzing such structures for potential abnormalities.

15

### BACKGROUND OF THE INVENTION

- For many forms of cancer, early detection is essential for a favorable prognosis. A cancerous growth must be detected at an early stage before the cancer is allowed to grow and spread. This is particularly true for colorectal and lung cancers. As a result, endoscopic techniques have been developed to examine the colon and tracheobronchial airways for the growth of precancerous and cancerous masses.

- Regarding colorectal cancer, the American Cancer Society and the National Cancer  
25 Institute recommend routine screening beginning at age 55 in order to



provide a means for early detection of abnormal growths. Under those guidelines over 50 million Americans should undergo annual colorectal screening. However, only about 1.5 million fiberoptic colonoscopies are performed each year. The

5 discrepancy arises, at least in part, because conventional colonoscopies require a patient to be sedated so that a flexible endoscope can be inserted into the patient's anus. Another problem is that conventional colonoscopies fail to provide access to

10 the entire colon in approximately 15% of cases. Colonoscopies also expose patients to the risk of bowel perforation. Accordingly, it is understandable that patients are reluctant to undergo, or repeatedly subject themselves to, such an invasive procedure.

15 Consequently, virtual endoscopic techniques have been, and are continuing to be developed. Virtual endoscopy that utilizes computer reformation of radiologic cross-sectional images is a minimally invasive alternative to conventional fiberoptic

20 endoscopy. Virtual endoscopy reduces the risk of perforation, does not require any sedation, and is considerably less expensive than the fiberoptic endoscopy method. For example, virtual colonoscopy techniques generally require bowel cleansing, gas

25 distension of the colon, a 40-60 second spiral computed tomography (CT) scan of a patient's abdomen and pelvis, and human visual analysis of multi-planar two-dimensional (2D) and three-dimensional (3D) images created from CT data.

30 Although virtual colonoscopy techniques provide excellent images of the colon in three-dimensions, a correct diagnosis hinges upon a physician's ability to properly identify small (approximately 5-10 mm), and sometimes subtle, masses within hundreds of

35 multiplanar two-dimensional and three-dimensional images. Such human inspection is time consuming,

tedious, expensive, and under certain circumstances prone to error of interpretation. Accordingly, it would be highly beneficial to provide an automatic virtual endoscopic system and method for automatically analyzing and/or detecting abnormalities, such as abnormal growths, in a targeted structure or organ system, such as the walls of a colon or trachea.

#### SUMMARY OF THE INVENTION

In accordance with the present invention, a computer-implemented method and computer system are provided for interactively displaying a three-dimensional rendering of a structure having a lumen. In a specific application, the method may be utilized for analyzing regions having certain characteristics of wall structure such as thickness or shape to detect, for example, abnormal masses. In accordance with the method of the present invention, a three-dimensional volume of data is formed from a series of two-dimensional images representing at least one physical property associated with the three-dimensional object. An isosurface of a selected region of interest is created in the computer from the volume of data based on selected values of the physical properties representing the selected region of interest. A wireframe model of the isosurface is generated by the computer. The wireframe model is analyzed to detect, by computer, those sections of the object having the selected characteristic such as abnormal wall structure. For example, the wireframe model includes a plurality of vertices. The computer-implemented method groups the vertices of the wireframe model into populations having a characteristic indicating abnormal wall structure. The wireframe model with highlighted abnormal portions is then rendered by the computer into an interactive three-dimensional display on the computer monitor.

In specific applications, the step of grouping the vertices into populations having a characteristic indicating abnormal wall structure is effected by determining a normal vertex for each vertex position of the wireframe model. Next, a connectivity matrix is determined to provide sets of contiguous vertices for each vertex. A wall thickness value associated with each normal vector is determined for each vertex. Local convexity and curvature are also determined on a per vertex basis. Then, contiguous vertices having a characteristic indicating abnormal thicknesses or other abnormal properties are grouped together into separate populations indicative of areas of abnormality. Either as a supplement or an alternative to determining abnormal thicknesses, the computer-implemented method may function to analyze shape characteristics of selected populations of vertices. For example, each population of contiguous vertices may be determined based on a characteristic such as convexity or curvature. Each population is then analyzed to determine a convexity value for each population representing an amount and direction of convexity of the population on the wireframe model. In selected applications, each population may be analyzed according to other selected shape characteristics.

In accordance with the present invention, a method and system are provided for interactively displaying a three-dimensional rendering of a structure having a lumen wherein the rendering is effected by an adaptive thresholding procedure. A three-dimensional volume of data is formed in a computer from a series of two-dimensional images acquired, for example, by a scanner such as CT-scanner. The acquired images represent at least one physical property associated with the three-dimensional object. A selected region of interest is

segmented by the computer from the volume of data based on a selected criteria such as a threshold value of the physical property. The threshold value is adaptively adjusted in the region of interest to control the segmenting of the selected region of interest. An isosurface of a selected region of interest is created by the computer from the volume of data based on selected values, such as the adaptive adjusted thresholds of the physical property representing the selected region of interest. Next, a wireframe model of the isosurface is generated and then rendered in an interactive three-dimensional display.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing summary, as well as the following detailed description of the preferred embodiments of the present invention, will be better understood when read in conjunction with the accompanying drawings, in which:

Fig. 1 is a flowchart representing a method in accordance with the present invention of producing an interactive, three-dimensional rendering of a selected organ system, such as a lumenous organ, and of detecting potentially abnormal areas of the organ system;

Fig. 2 is a flowchart representing a method for analyzing the shape of a population representing a potentially abnormal area within the selected organ system;

Fig. 3 is a flowchart representing a method for measuring the selected organ system's wall thickness;

Fig. 4 is a block diagram of a system used in the method of the present invention;

Fig. 5 is a schematic representation of a two-dimensional plane through a wireframe model of an area of abnormal wall structure illustrating a method for



determining the convexity of the area;

Fig. 6 is a flowchart representing a method for adaptively adjusting a threshold value during the segmentation of a region of interest;

Fig. 7 is a schematic view of a display window  
5 for displaying a volume rendered image, a surface rendered image, and three multiplanar images along three different planes of a selected organ system;

Fig. 8 is flowchart representing a method for determining a central path through the lumen of a  
10 hollow organ;

Fig. 9 is a schematic view of a display window for displaying a volume rendered image, a surface rendered image, and three multiplanar images along three different planes of a selected organ system  
15 combined in a single window display; and

Fig. 10a-h are schematic illustrations depicting a process for splitting a colon.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 The present invention generally relates to a method and system, as schematically represented in Figs. 1-4, for generating interactive, three-dimensional renderings of three-dimensional structures generally having a lumen. The structures are usually  
25 in the general form of selected regions of a body and in particular, human or animal body organs which have hollow lumens such as colons, blood vessels, and airways. In accordance with the present invention, the interactive three-dimensional renderings are  
30 generated in a computer-controlled process from a series of two-dimensional, cross-sectional images of the selected body organ acquired, for example, from a helical (computed tomography (CT) Scan. The three-dimensional renderings are interactive in that such  
35 renderings can be manipulated by a user on a visual display of a computer system, such as a computer

monitor, to enable movement in, around and through the three-dimensional structure while simultaneously displaying multiplanar views centered on a point that changes in response to the movement, or on a point selected by the user.

5       The computer-generated interactive three-dimensional renderings can be constructed from surface renderings of the organ system or from volume renderings of the organ system and surrounding anatomy and, often, presented simultaneously in the same  
10       three-dimensional display window. In a selected embodiment, a surface rendering of an organ can be incorporated into a volume rendering of the surrounding anatomy using texture memory in order to  
15       achieve a combined surface/volume rendering, or a hybrid rendering effect, wherein the surface rendered organ may be highlighted in the context of the volume-rendered surrounding anatomy. In yet another  
20       embodiment, multiplanar views such as orthogonal (sagittal, coronal, and axial) or oblique views, may be presented simultaneously with a surface-rendered organ and surrounding volume-rendered anatomy in either separate three-dimensional display windows or in a combined single three-dimensional or display window.

25       A computer-controlled system 20 in accordance with the present invention is shown schematically in Fig. 4. The system 20 is generally as described in co-pending application Serial No. 08/331,352, which is incorporated herein by reference. Briefly, a computer  
30       console 24 is used to operate a scanner 22 to produce a series of two-dimensional, cross-sectional images of a selected three-dimensional object. The two-dimensional images are transferred from the console 24 to a computer graphics workstation 26 over a computer  
35       network 25. The graphics computer 26 is used to generate a three-dimensional rendering, such as a

three dimensional surface rendering, of the selected object and to automatically identify potentially abnormal regions of the structure. The three-dimensional rendering is displayed on a computer monitor 28. Additionally, the displayed rendering<sup>5</sup> can be recorded on a video recorder 30 or photographed for future viewing. Various inputs, such as a computer mouse 27, are provided to the graphics computer to permit a user to manipulate the displayed imagery.

The scanner 22 can be a General Electric HiSpeed Advantage Helical CT Scanner (GE Medical Systems, Milwaukee, WI). For scanning a patient's lungs, the scanner is typically operated with an X-ray beam collimation of 3 mm, a pitch of 1:1, a 1 mm reconstruction interval, a display field-of-view of 25.6 cm, and a 512x512 matrix. For scanning a patient's colon, the scanner is typically operated with a beam collimation of 5 mm, a pitch of 2:1, a 1 mm reconstruction interval, a display field-of-view of 40 cm, and a 512x512 matrix. These protocols typically result in approximately 200 thoracic CT images or 500 abdominal CT images, which occupy approximately 100 MB and 250 MB of disk storage space, respectively. However, the protocols can be modified to optimally acquire image data of specific organ systems.

The image data can be stored in any of a variety of image formats. For example, the image data can be stored in the digital imaging and communications in medicine (DICOM) standard, or as raw binary slices, or in a variety of volume formats. For example, the image data can be stored in the computer memory in an internal data format which allows the image files to be saved as a single data volume instead of individual image files. The internal data format can also permit standard compression and uncompression techniques to be incorporated, thereby reducing computer disk

storage requirements.

A method for generating interactive, three-dimensional renderings of a selected structure having a lumen and indicating potentially abnormal regions of the structure in accordance with the present invention is generally set forth in Fig. 1. The method can be implemented by computer. The steps of patient preparation 32, acquisition of two-dimensional images 33, formation of a three-dimensional volume 34, segmentation of a region of interest 35, creation of an isosurface of the region of interest 37, and generation of a wireframe model of the isosurface 38 may be effected in the general manner described in co-pending application Serial No. 08/331,352, which is incorporated herein by reference or any comparable methodologies and algorithms.

Patient preparation 32 will be dictated by the organ system to be rendered. For example, if the patient's colon is to be rendered, the patient is prepared using bowel cleansing and insufflation with gas to distend the colon. In addition, the patient can be given an oral contrast agent to become incorporated in the fecal content to readily distinguish the stool from surrounding soft tissue structures, including the colon wall. Without adequate bowel cleansing or use of an oral contrast agent, stool and normal colon wall or colon lesions can be indistinguishable in computed tomography or other radiologic modality images. For example, the contrast agent may comprise a low-density (e.g., 1.5% w/v) barium-containing mixture. The opacified stool may then be digitally subtracted from the CT image data in order to render an unimpeded colon. Alternatively, for rendering a patient's airways, the patient can be administered a bolus of non-ionic intravenous iodinated contrast agent to aid in distinguishing the blood vessels surrounding the

airways.

Once the patient has been prepared, two dimensional, cross-sectional images of the selected structure are acquired at step 33 with the use of a scanner 22, such as a helical computed tomography (CT) scanner or magnetic resonance imaging (MRI) scanner. The two-dimensional images are arranged in computer memory 21 (i.e., random access memory (RAM)) to create a three-dimensional data volume at step 34. To create isocubic volume elements (i.e., voxels), an interpolation method, including but not limited to trilinear interpolation, can be applied.

At step 35, a region of interest is segmented from the three-dimensional data volume. The purpose of segmentation is to isolate a region of interest within the three-dimensional data volume prior to three-dimensional rendering. In general, medical image segmentation is complicated by image noise, partial volume effects, and the fact that similar intensity values are shared by different anatomical structures. However, when a thin-walled soft tissue structure encompasses an air-filled lumen, segmentation of that structure can be effectuated by selecting the air column as the region of interest. The air column can be effectively segmented because the boundary between air and soft tissue is relatively distinct and sharp. Further, the outside surface of the air column corresponds to the inside surface of the organ of interest. Similarly, when a thin-walled soft tissue structure encompasses a contrast enhanced blood-filled lumen, segmentation of that structure can be effectuated by selecting the contrast-enhanced blood column as the region of interest. Accordingly, a simple thresholding or region growing technique, along with a morphological dilation away from air or blood vessel and towards soft tissue, can be utilized for segmentation purposes.

However, in order to refine and to improve the accuracy of the segmentation process, especially as selected structures have varying characteristics (e.g., changing diameter, wall thickness, and/or X-ray attenuation values), more sophisticated segmentation procedures can be employed. One such procedure adaptively adjusts the threshold value defining the region of interest to more accurately segment specific sections of the organ during a region growing process. For example, adaptive thresholding techniques can be used to segment a patient's airways, especially as a threshold value of -425 Hounsfield units (HU) may be appropriate for the larger airways, but -800 HU may be more appropriate for smaller airways. Therefore, by varying the threshold value between these two extremes, the influence of airway structure and surrounding tissues can be accounted for, especially as partial volume effects become apparent in the smaller airways.

A computer-executed method for adaptively adjusting threshold values for the airways is shown in Fig. 6. At step 75, the region of interest is segmented using a three-dimensional region growing technique and an initial static threshold value. The threshold value chosen should approach the maximum threshold value which can be selected without having the segmentation procedure fail by including surrounding structures as part of the region of interest. For example, when segmenting the air column of an airway, an initial threshold value of -800 HU may be appropriate. An initial wireframe model of the anatomy is created using a marching cubes variant.

The voxels or volume elements of the segmented region of interest are tagged at step 77 by setting a high-order bit in the 16-bit computer word used to store the voxel values (usually only the lower-order 12 bits of a 16 bit word hold any actual data). At

step 79, the tagged voxels are used to find the  
 boundary and voxel counts in two-dimensions for each  
 airway segment on every image slice. The voxels  
 within each boundary are distinctly re-tagged at  
 step 81 by setting a different high-order bit. At  
 5 step 83, the vertices on the initial three-dimensional  
 wireframe model closest to each two-dimensional  
 boundary point of each segment are found. An  
 intensity profile along each vertex's normal vector is  
 calculated to measure x-ray attenuations factors  
 10 incremental along the normal directions at step 85.  
 The intensity profiles extend bidirectionally, into  
 the surrounding tissue until the voxel values begin to  
 decrease, and into the airway lumen until the voxel  
 values begin to increase.

15 The adaptive threshold value is calculated for  
 each segment on every image at step 87 as an average  
 value of several measured threshold values for each  
 segment. Each adaptive threshold value can be  
 calculated as a variable percentage of the difference  
 20 between the average maximum and minimum attenuation  
 factors for the corresponding intensity profile. For  
 example, a percentage of 50% corresponds to the full-  
 width-at-half-maximum measure of the intensity  
 profile. The adaptive threshold values are then used  
 25 to re-segment the region of interest at step 88 using  
 a region growing process that can account for the  
 varying threshold values.

Alternatively, the adaptive threshold values can  
 be calculated by morphing a ring which represents the  
 30 intersection of the airway and a perpendicular plane  
 along the skeleton of the airway. The skeleton is a  
 sequence of connected points that lie along the center  
 of the air columns, like a central path. The initial  
 reference ring lies in the initial perpendicular plane  
 35 and is the set of iso-value points of an  
 underestimated threshold value on that plane in the

largest branch of the airway. Using this ring as a reference, the threshold value is changed to create a new ring in the same plane, with a larger circumference and larger curvature values than the reference ring. If the increase in circumference and curvature values are below a certain limit, then the old threshold value is replaced by the new threshold, and the process is repeated. When the maximums are exceeded, the new threshold value is stored on the skeleton, the perpendicular plane is shifted to the next point on the skeleton, and the previous threshold value is used as the initial threshold value for the iso-value ring on the new plane. This process is repeated for every branch along the skeleton until every point in the skeleton has an associated adaptive threshold value. A variant of the marching cubes can then be used to generate a variable-value surface using the variable threshold values.

Another method for adaptively adjusting the threshold value used to grow an object, uses the morphological skeleton of an approximate object to choose optimal threshold values for all parts of the final object. The object is first grown using a lower threshold value. This gives the base structure, but usually does not accurately segment all of the object. Then, the medial axis is calculated from the morphological skeleton of the object. For each voxel on the medial axis, the algorithm searches out (in bi-directional rays perpendicular to the local axis) the local maxima and minima of voxel values along the search line. The full-width-at-half-the-maximum value, or a variable percentage value, is then calculated for each bi-directional ray, and all rays for a particular axis point are averaged to give a threshold value at the axis point. During segmentation, the nearest axis point to the current voxel is determined, and the threshold value



associated with that point is used to classify the voxel as being inside or outside the object using a region growing procedure.

Yet another technique for adaptive thresholding involves manually specifying markers in the volume to hold threshold values that best approximate the object at that location. The markers are established for all sections of the object that need special threshold values. A global threshold value is also specified. During the region growing segmentation process, the algorithm checks to see if the current voxel is near a threshold marker. If so, the threshold value associated with the marker is used to classify the voxel as being inside or outside the object. The range for calling a position near the marker, as well as the behavior if the position is inside the specified range (the threshold can be linearly scaled or applied unchanged), can be user-specified. However, if the current voxel is not near a threshold marker, the global threshold is used to classify the voxel.

Still another technique for adaptive thresholding modifies the threshold value as a function of the distance from the starting seed of the region growing procedure. The user may specify that voxels near the seed should be within a certain range, but voxels farther away from the seed should fall within a different range. The thresholds for positions in between can be found by interpolating between the ranges. For this technique, any number of distance and threshold ranges can be specified.

Returning to Fig. 1, once the region of interest has been segmented, an isosurface of the region of interest is created at step 37. The isosurface can be generated using a variant of a marching cube algorithm. The isosurface is then used to generate a wireframe model at step 38. The wireframe model

comprises a polygonal mesh that corresponds to the surface of the region of interest.

After the wireframe model has been generated at step 38, connectivity matrices are determined at step 39. The connectivity matrices are data structures which provide information regarding the connectivity between the vertices and polygons which comprise the wireframe model. The connectivity matrices are determined by traversing the polygon and vertex lists associated with the wireframe model, generating sets of immediate neighbor vertices and triangles associated with each vertex and polygon in the lists. For example, the vertex to polygon connectivity matrix contains, for each vertex in the wireframe model, a list of all polygons that contain that vertex. Likewise, a polygon to polygon matrix lists all adjacent polygons for each polygon in the model.

Using these connectivity matrices, the polygon list of the wireframe model is then re-ordered. The polygons generated using the variant of marching cubes are usually added to, and as such ordered in, the polygon list as the three dimensional volume is traversed. Accordingly, all of the polygons between the first and second images are generated first, followed by the polygons between the second and third images, and so forth. This polygon ordering is not intuitive, nor ideal for analysis or manipulation of the geometry at the local connectivity level. Consequently, to group vertices into populations and to analyze the populations, it is advantageous to re-order the polygons into the sequence by which they would be encountered while "traveling" through the lumen of the wireframe model. In addition, the re-ordering facilitates rapid three-dimensional renderings, since hidden objects or objects outside of the field-of-view can be easily identified and removed, thereby reducing the number of polygons

rendered and thus increasing the rendering speed.

The re-ordered connectivity matrices are also a means to rapidly calculate an arbitrarily oriented cross-sectional area of an object or a region of interest. This is done by generating the intersection of the wireframe model with a plane of user-defined orientation. Three user-defined points of intersection with the object defines the plane. The intersection of the plane with the wireframe model is outlined by a set of points that are generally in the shape of a distorted ring. By connecting these N points, a polygon with N sides is formed. This polygon can be divided into N-2 triangles by connecting the first point in the ring with every other point on the ring. The cross-sectional area can be approximated by summing the areas of each triangle.

The vertices of the wireframe model can be analyzed and grouped into populations having abnormal wall structure as shown at steps 40-45 in Fig. 1. At step 40, a normal vector is calculated for each vertex in a the wireframe model. The direction of each normal vector is perpendicular to a plane that is tangent to the isosurface at each such vertex, typically pointing away from the object or away from the lumen of a body organ. The normal vectors at the respective vertices can be computed as the average of the normal vectors associated with each polygon connected to that vertex. The normal vector associated with a polygon is calculated using a vector cross product. Alternatively, the normal vector at a vertex can be computed as a weighted average of the normal vectors associated with those polygons of the wireframe model which are within a predetermined distance from a specific vertex. A third method is to compute the normal vector at a vertex, component-wise (e.g., x, y, and z), by calculating the three dimensional gradients of the local volume surrounding

the vertex.

The wall thickness of the structure at each vertex is measured at step 41. The wall thickness at a given vertex can be determined by measuring the distance from the inner surface of the selected object to its outer surface or some other position between the inner and outer surfaces. For body parts such as the colon or airways, the selected structure's wall is composed of soft tissue and the lumen of the structure comprises air. Accordingly, the inner surface corresponds to an air/soft tissue interface. Further, the colon and airways are typically surrounded by fat, air, or other non-soft tissue material (i.e., contrast-enhanced blood vessels, bone, or calcification). Accordingly, the outer surface corresponds to the soft tissue/air, soft tissue/bone, soft tissue/fat, or other such interface. The X-ray attenuation factors for air (approximately -1024 HU to -425 HU), fat (about -200 HU to -20 HU), and other non-soft tissue structures such as contrast-enhanced blood vessels and bone (approximately >100 HU) are distinct from the soft tissue component (about 20 HU to 100 HU) of the airways or colon wall. Accordingly, the wall thickness at a vertex on the wireframe model can be calculated from the volume data of the selected organ, which can be measured at regularly spaced intervals along each normal vector, as will now be described.

In general, for each vertex,  $v$ , and its corresponding normal vector,  $N$ , an X-ray attenuation factor,  $A(p_i)$ , can be determined for each point  $p_i$  along the normal, where  $p_i = v + iN$  for  $1 \leq i \leq \text{max\_depth}$  and  $\text{max\_depth}$  is a user-definable maximum search depth, typically set at 15. The wall thickness value,  $T$ , is initially set to zero but is incremented by one for each consecutive point  $p_i$  which has a corresponding X-ray attenuation value that falls within a range of

-425 HU to +100 HU and that satisfies certain criteria.

Specifically, the wall thickness at each vertex can be measured as shown in Fig. 3. At step 56, one of the vertices,  $v$ , of the wireframe model is  
5 selected. The thickness,  $T$ , at that vertex is initially set to zero at step 57 and a counter,  $i$ , is set to one at step 58.

The voxel value, such as the x-ray attenuation factor,  $A(p_i)$ , for the  $i^{\text{th}}$  point along the normal is  
10 measured at step 59. At step 60, it is determined whether  $i=5$ . If  $i$  does not equal 5, then it is determined if  $A(p_i)$  is between -425 HU and +100 HU, and if  $A(p_i)$  is between -425 HU and +100 HU, then the thickness  $T$  is incremented by one at step 61. The  
15 process proceeds to step 65.

At step 65, it is determined whether  $A(p_i) < -100$  HU and  $A(p_j) \geq -100$  HU for some value of  $1 \leq j \leq (i-1)$ . If this expression is satisfied, then a soft tissue/fat or soft tissue/air interface is  
20 considered to have been reached. Accordingly, the thickness  $T$  is not incremented and the process proceeds to step 71.

At step 71, it is determined whether there is a vertex whose thickness has not yet been measured. If  
25 there is a vertex whose thickness has not been measured, that vertex is selected at step 56. Otherwise, the wall thickness at all vertices would have been measured and the process ends at step 72.

Returning to step 65, if the expression at  
30 step 65 is not satisfied, then it is determined at step 66 whether  $A(p_i) > 100$  HU. If  $A(p_i)$  is greater than 100 HU, then a soft tissue/bone interface or an interface with some other high-density material is considered to have been reached. Accordingly, the  
35 thickness  $T$  is not incremented and the process proceeds to step 71.

If  $A(p_i)$  is not greater than 100 HU at step 66, then the process proceeds to step 68 where counter  $i$  is incremented by one. At step 70, it is determined if counter  $i$  exceeds the predetermined value of  $\text{max\_depth}$ . If  $i > \text{max\_depth}$ , then the process proceeds to step 71. If, however,  $i \leq \text{max\_depth}$ , then  $A(p_i)$  is measured at step 59.

Returning to step 60, if  $i=5$ , then the attenuation factors for the first five points,  $A(p_1)$  through  $A(p_5)$ , are evaluated at step 62 to determine if all of those attenuation factors are less than -110 HU. If all of those attenuation factors are less than -110 HU, the wall thickness at that vertex is considered to be normal. This situation often arises along the colon's haustra, or where opposing segments of gas distended bowel touch. Accordingly, the thickness value,  $T$ , is set to zero at step 63 and the process proceeds to step 71. By assigning  $T=0$  to a vertex,  $v$ , that vertex is considered to be associated with normal colon wall.

Returning to step 62, if the attenuation value at any of the first five points ( $A(p_1)$  through  $A(p_5)$ ) exceeds -110 HU, then the wall thickness determination continues at step 61.

Since the wall thickness of body structures such as the colon may be inadvertently or artificially increased, such as during musculature contraction of the colon at certain positions along the colon structure, many of the regions of abnormal thickness may not be indicative of true lesions. Instead, the thickened regions may represent normal structural elements, such as regions where the colon is contracted or where it touches solid organs. Accordingly, it can be beneficial to further analyze and characterize each vertex associated with abnormal thickness to refine the list of potentially abnormal vertices. Additional local shape features can be used

to characterize and associate vertices as being abnormal.

For example, a local convexity value at each of the surface vertices can be determined at step 42. The local convexity values can be determined for all  
 5 vertices, or for only those vertices associated with abnormal wall thickness. For each vertex, its neighboring vertices within a connected neighborhood of a pre-determined size (e.g., 3), is determined using the connectivity matrices. A local convexity  
 10 value for each vertex,  $v$ , is computed as:

$$C = \sum_{i=1}^n D(v_i)$$

wherein  $D(v_i)$  is the distance from the  $i^{\text{th}}$  neighboring vertex to a plane through  $v$  and perpendicular to  $v$ 's normal vector, and  $n$  is the number of neighboring  
 15 vertices. Vertices associated with a convexity value of greater than a pre-defined maximum (e.g.,  $>2$ ) can be considered abnormal.

In addition, the local curvature at each vertex in a population can be determined at step 43 in  
 20 Fig. 1. The curvature reflects another shape feature of the object's surface at a given vertex. Vertices associated with broad curvatures indicate regions that are relatively flat. Accordingly, if the user wishes to identify only regions having thicknesses that vary  
 25 significantly over short distances, those vertices with small curvatures may be labeled as abnormal.

The local curvature at each vertex in a population can be determined by summing the scalar distance between each of a user-determined number of  
 30 levels,  $N$ , of adjacent vertices and the plane perpendicular to the normal of the vertex. The result is then normalized by the surface area outlined by the

N<sup>th</sup> level of adjacent vertices. Because the direction of the curvature is ignored, the technique is able to detect areas of small curvature.

At step 44, vertices representing an abnormality are selected. Those vertices meeting selected  
5 criteria can be identified as abnormal vertices. For example, vertices having abnormal thickness and/or convexity and/or curvature criteria may be identified as abnormal vertices. In a specific application, the wall thickness values, local convexity values, and  
10 local curvature values can be used, independently or in conjunction with each other, to either accept or reject vertices as being abnormal. The individual parameters can be combined using a logical AND operation.

At step 45, the vertices on the wireframe model  
15 associated with abnormal structure (i.e., having a combination of associated abnormal wall thickness and/or abnormal shape, such as abnormal local convexity and/or abnormal local curvature) are grouped  
20 into populations. The re-ordered connectivity matrices are used to determine if vertices associated with abnormal parameters are directly connected to other vertices that are also associated with abnormal parameters. Accordingly, each formed population  
25 represents a potential abnormal lesion. In addition, each population can be further analyzed and characterized by its size, dimensions, or other statistical quantities.

Generally, the size of a population is indicated  
30 by the number of vertices which comprise the population. At step 46, those populations having a size below a predetermined minimal value are excluded from being considered abnormal. If the size of a population is sufficiently small, then the population  
35 is unlikely to represent a true lesion. Instead, the population more likely represents a normal aberration



in the structure or image segmentation process. Accordingly, elimination of those populations having a size below a minimum value, decreases the occurrence of false positive findings.

Each population is further analyzed according to shape at step 47 to reduce the occurrence of false positive findings. Since the structure of body organs may appear abnormal, either inadvertently or artificially, such as during muscular contraction of the colon at certain positions along the colon's structure, many of the abnormal populations may not be indicative of true lesions. Instead, these populations may represent normal structural elements, such as regions where the colon is contracted or where it touches solid organs. Accordingly, it may be advantageous to further analyze and characterize each population identified as having an abnormal structure to further refine the list of potential lesions and to increase the likelihood that a detected population represents a true abnormality.

For example, the shapes of the populations can be analyzed, characterized, and accepted or rejected as being abnormal as illustrated in detail in Fig. 2. At step 120 a centroid for each population is calculated. The centroid can be computed as a weighted sum of the positions of each vertex within the population. The individual vertices can be weighted by their associated wall thickness values or other parameters. Once the centroid has been determined for a population, the height and normal vector for that population can be determined.

A population normal vector is calculated for each population at step 121. The population normal vector can be computed as a sum of the normal vectors at each of the vertices within the population, and the individual vertex normal vectors can be weighted by their corresponding wall thickness values or other

parameters.

The convexity value, (C), for each population is determined at step 122. The convexity is a measure of the direction and magnitude of the shape of the surface of the population. As shown in Fig. 5, the convexity of a population is computed as the sum of the distances 94 from vertices 95 in the population to a plane 96, perpendicular to the population normal vector 97 passing through the centroid 98, according to the equation:

10

$$C = \sum_{i=1}^n D(v_i)$$

wherein  $D(v_i)$  is the distance from the  $i^{\text{th}}$  vertex of the population to the plane 96 and  $n$  is the number of vertices 95 within a predetermined space relative to the centroid. Since the normals at each vertex are typically assigned to point away from the center of the object, or the lumen of the object, a population which protrudes into the lumen of the object would have a positive convexity value, whereas a population that projects away from the lumen would exhibit a negative convexity value. When the structure is a colon, populations with a negative convexity value are excluded from being considered abnormal, since abnormal colon masses tend to project into the lumen of the colon and would have a positive convexity value.

Further, the higher the magnitude of the convexity value, the greater the slope of the surface of the population. When the structure is a colon, only populations having a positive convexity value above a minimum value are reasonably expected to be potential lesions, since cancerous colon masses are generally manifested by steeply sloped growths that

protrude into the lumen of the colon.

The height (H) of each population is determined at step 123. The height is calculated as the difference between the distance of the vertex farthest from a plane 96, perpendicular to the population normal 97 and passing through the centroid 98, and the distance of the vertex closest to that plane according to the equation:

$$H = \text{MAX } D(v_i) - \text{MIN } D(v_i).$$

The height provides an indication as to whether a population is reasonably expected to be a true lesion since populations with large heights are more likely to represent abnormal masses.

Other shape features may be used to include or exclude populations in the list of potential lesions. For example, if a population has a long axis dimension that is greater than a multiple (e.g., 10 times) of the short axis dimension, and the short axis dimension is, for example, less than 5 mm wide, then the population might be considered to be normal. Accordingly, the shape features discussed herein are included only by way of example, and are not intended to limit the scope of the invention.

Referring again to Fig. 1, after the populations with abnormal wall structure (i.e., wall thickness, convexity, or other shape feature) have been identified and characterized, populations that fail to meet certain criteria are eliminated as potential lesions at step 48.

At step 49, those populations which are still considered to represent potential lesions are sorted and arranged in an electronic listing. The listing could be sorted according to such properties as size, convexity, curvature, height, mean wall thickness, standard deviation of wall thickness, other

statistical quantities, or a combination of such  
 parameters (e.g., the product of the group convexity  
 value, C, and the group height value, H). Each  
 population in the listing could be linked to a three-  
 dimensional camera position that best illustrates it  
 5 in the three-dimensional display. Accordingly, the  
 user could choose a population from the listing and  
 thereby be presented with a view of the abnormal area  
 as it appears in the three-dimensional rendering. One  
 means of linking the population to a three-dimensional  
 10 rendering camera position is by providing the user  
 with a three-dimensional camera view of the population  
 that is parallel to the population normal and centered  
 on the centroid of the population, and set at a chosen  
 distance from the centroid. In one embodiment, the  
 15 user is presented with two views of the selected  
 population, one from an external perspective and the  
 other from an internal perspective (i.e., from within  
 the lumen of the structure).

A three-dimensional rendering of the wireframe  
 20 model is displayed at step 50. In one embodiment, the  
 user can navigate through a three-dimensional  
 rendering of the wireframe model which is displayed on  
 the monitor 28. The detected abnormal populations are  
 displayed with a contrasting color scheme to  
 25 distinguish them from the remainder of the rendered  
 structure, so that the abnormal populations can be  
 quickly and easily identified by human visual  
 inspection. Further, the color scheme can reflect  
 variations in wall thickness, convexity, or curvature,  
 30 or some other parameter. For example, the normal  
 portions of the rendered structure can be displayed in  
 shades of pink while the potentially abnormal  
 populations are displayed in shades of blue. More  
 specifically, vertices could be assigned colors  
 35 ranging from dark blue (for vertices with minimum  
 abnormal thickness) to bright blue (for vertices with

maximum abnormal wall thickness) to provide a stark contrast to the pinkish color assigned to the normal portions of the rendered structure.

Instead of navigating through the rendered structure, a "split open" view of the three-dimensional rendered structure can be displayed, thereby allowing the user to view the interior surface of the structure, like a topological map, without visual obstruction. The splitting can be accomplished using the re-ordered connectivity matrices, described above, and a central path to divide the wireframe model into several smaller segments, and then split each segment in half to expose the interior surfaces of the segments. The use of the connectivity matrices allows for the splitting of the wireframe to be independent of the degree of overall curvature of the central path of the wireframe model. This approach overcomes the mathematical restrictions inherent in other commonly used cutting plane techniques, such as found in a single infinite cutting plane, spherical-shaped cutting plane, or cylindrically-shaped cutting plane, and allows for an arbitrary number of segments to be split with only a single pass over the wireframe's polygon listing.

The splitting is accomplished by first approximating a curved cutting surface with a sequence of finite, intersecting planes. These planes contain (i.e., pass through) the central path of the wireframe model. The central path can be calculated, as shown in Fig. 8, by first generating points that are medially located within the colon or lumen. Second, the detected medial points are linked into connected central paths and the path that is most appropriate for colon visualization is selected by removing any accessory paths that run through small holes caused by anatomical variations or image segmentation artifacts.

The central path algorithm uses an object's

three-dimensional skeleton to find a path that lies along the center of its lumen. First, a user picks a starting and an ending point for the path. These may be chosen using the multiplanar image display and a computer mouse. After the starting and ending points are selected, the algorithm performs a three-dimensional topological thinning of the object's region-grown segmented data. Thinning is like peeling an onion: the outer layers of the object are incrementally removed so that the overall topology (shape) is preserved. The resulting structure is a three-dimensional skeleton of the object, which, when the points are connected, generally consists of one-dimensional curves and two-dimensional surfaces. The thinning phase can be improved by using equivalence classes to classify neighborhoods of voxels instead of searching for all possible neighboring relationships.

This method of three-dimensional topological thinning is significant in three aspects. First, the determination of connectivity is more efficient because it is based on finding equivalence rather than searching all possible neighboring relationships, as is used in most conventional methods.

Second, the thinning process never examines background points more than once. Special data structures called queues are used to improve the efficiency of thinning. This method saves time compared to conventional methods by storing surface points (voxels on the outer surface of the region-grown object that are candidates for removal) in queues, after going through the original volume during a single pass. As thinning proceeds, newly exposed surface points are added to the queues whenever a surface point on the queue is removed. The thinning process stops when the queues become empty.

Third, the distance transform for the three-dimensional region-grown object is then calculated.

The distance transform of a point in the object is the distance from this point to the nearest volume point not in the object. The distance transform is used to find the centers of maximally inscribed balls (CMB) in the object's lumen. A CMB can be thought of as the  
5 largest sphere that can fit into the lumen of the object. The centers of the CMB's can be used as anchor points in the thinning process, which insures that the generated central path is medially located and insensitive to the orientation of the original  
10 object (e.g., colon).

Many branches of medially located curves and surfaces will be generated in the thinning process, so the user defined starting and ending points are used to remove dead-end branches. The result is a curve  
15 that starts and ends at the specified points but may contain loops that represent accessory passages through the object that go to the same place.

The path selection phase converts the skeleton points into a graph representation by linking the  
20 points together into connected paths, which are called edges in the graph. The points where multiple paths meet are vertices in the graph. After the graph is built, unwanted edges are removed based on the radii of the CMB's associated with the points on the path,  
25 which is taken from the distance transform applied during the thinning phase.

The next step of path selection is basically a graph reduction process. A Greedy search algorithm is used for this purpose which removes all edges at each  
30 vertex except the two with the largest weights. The weight of each edge is a function of the radii of the points of the edge. One effective weighting method finds the smallest CMB radius of all points on the edge. Alternatively, the user may manually select the  
35 incorrect edges. After all incorrect edges have been removed, the remaining edges form the central path

along the lumen of the object, such as the central path of the colon.

Alternatively, the central path can be determined by selecting a first seed point which lies within the lumen of the segmented object. The plane passing through that point that has the minimum area of object dissection is determined and the center of such area calculated. A new seed point is then selected which lies a pre-determined distance away from the first seed point in a perpendicular direction relative to the plane of minimum area passing through the first seed point. A plane of minimum area that passes through the new seed point is determined and the center calculated. This iterative process is continued until a central path connecting the center points is determined.

Referring to Fig. 10a, a segment of colon 300 is schematically depicted having a center line 305. Now returning to splitting the object, by variably subsampling points 310, 312, 314 along the central path, as shown in Fig. 10b, a sequence of consecutive points, connected by line segments 320, are determined. For each pair of these line segments connected at a point, a slicing plane 325 perpendicular to the line segment (a portion of the central path) and containing the point is calculated. For each of these line segments, a halving plane 330 is determined, as shown in Fig. 10c. The first halving plane is calculated to contain the line segment 320 and a point 340, arbitrarily specified by an angle offset from a predetermined axis perpendicular to the line segment. By changing the angle offset, as shown in Fig. 10d, the halving plane 330 is rotated around the line segment (like the hands of a clock). The second halving plane 332 is calculated to contain the second line segment and the intersection of the first halving plane with the first



slicing plane. This second halving plane is unique and solely dependent on the orientation of the first halving plane. Accordingly, rotating the initial halving plane rotates the second halving plane. Similarly, the third halving plane 323 is calculated to contain the third line segment, and the intersection of the second halving plane with the second slicing plane, and so forth. The resulting connected halving planes approximate a curved cutting surface that follows the central path, and the resulting slicing planes are used in conjunction with the re-ordered connectivity matrices to split along the halving planes.

The splitting of the wireframe model is, then, accomplished, as shown in Fig. 10e, by selecting and marking an initial seed polygon 350. Using the re-ordered connectivity matrices, polygons adjacent to the seed are checked against the first slicing plane 325, marking those that are on the same side as the seed polygon. Each of the newly checked and marked polygons becomes a new seed, and each of its unchecked and unmarked polygons are identically checked against the first slicing plane until all polygons sequentially connected to the original seed polygon are marked. As shown in Fig. 10f, each of these marked polygons are then checked against the first halving plane 330 and stored, divided along the plane 330 to provide colon halves 360 and 361, as shown in Fig. 10g. An unmarked polygon adjacent to the last marked polygon is used as a seed for the second iteration of this process, as it is repeated until no unmarked and unchecked polygons remain. As shown in Fig. 10h, the resulting split and halved segments 360 and 361, 370 and 371, 380 and 381, and 390 and 391, may be displayed individually or in groups, and can be color enhanced to easily identify interior and exterior surfaces.

In an alternate embodiment, the user is presented with a volume rendered display centered on the centroid of a selected abnormal population. For example, a volume-rendered view of a subvolume of user defined size centered on the centroid of the

5 population can be displayed for visual inspection. Volume rendering is a visualization technique that creates a three-dimensional image using all of the volume data, rather than only an extracted surface representation. Traditionally, volume rendering is

10 accomplished by projecting a series of rays from the user's viewpoint through the data volume. The color at each point (i.e., pixel) in the resulting three-dimensional image is determined by calculating a weighted sum of all voxels along each ray. This

15 weighting factor is determined by a transfer function that is computed during a process called classification.

Altering the transfer function during volume rendering can reveal different characteristics of the

20 rendered data and, thus, it is often desirable to interactively reclassify and re-render the data. However, the rate at which images are rendered can be slow for data volumes as large as the ones typically used in medical imaging. Accordingly, it can be

25 beneficial to use texture mapping to dramatically increase the rate at which volume rendering is performed. In texture mapping, volume data is considered to be a series of two-dimensional textures that are interpolated, projected, and displayed

30 rapidly on a series of polygons using specialized computer hardware.

The texture mapped volume rendering method uses high-speed texture memory and blending hardware available on a Silicon Graphics' computer workstation

35 to approximate the results of the more computationally expensive ray-casting algorithm. The volume data is

first loaded into texture memory. The textures are then semi-transparently mapped onto a series of parallel two-dimensional rectangles that correspond to slices of the volume. The texture mapped rectangles are then drawn and blended to allow the user to see through the volume. The colors and transparencies of the resulting three-dimensional object are controlled by color and opacity transfer functions. The entire volume can then be viewed by stacking the texture mapped rectangles in the proper order and looking toward the stack. Since viewing the stack along one of its edges does not optimally display the volume, a new stack is generated which is orthogonal to the original stack. This new stack is then used to display the volume along an edge. Likewise, for any additional viewing angles, additional stacks may be required. Generating the stacks is a dynamic process and each stack can be generated on an as needed basis. Texture mapping can use standard two-dimensional texture memory or faster three-dimensional texture memory.

In yet another alternate embodiment, upon selection of a population from the listing, the user can be presented with a three-dimensional, surface-rendered wireframe model of the population embedded within a volume-rendered display using texture memory techniques. Such a display is useful to show the three-dimensional relationships between the wireframe model and the volume data. Embedding a surface-rendered model inside a volume rendering can be accomplished using texture memory since both techniques use semi-transparent or opaque surfaces to generate their imagery. However, if the surface rendering is semi-transparent, care must be taken to ensure that all objects are blended in the proper order (typically, from back to front). All or part of the volume can be rendered. For example, to view a

small structure using volume rendering, a subvolume of data surrounding that structure can be rendered, as opposed to displaying the entire volume of data. It should also be appreciated that the multiplanar views and volume rendering can be combined in a similar manner.

5 If the user wants to view the results of the various rendering techniques using separate display windows, the user can clone the display window 200 so that the two (or more) display windows share the same data. However, each display window could render using different techniques (i.e., multiplanar display, surface rendering, volume rendering). Accordingly, the user could open a single window with all three rendering techniques and then clone the window three times to view each technique separately. Changes made to the data in any one of the connected windows would be propagated to all the cloned windows. Camera orientations could be synchronized between the separate windows to lock the views together. Position tracking techniques could show the camera position of one viewer in another, so that the user could follow the path of a three-dimensional camera moving inside the structure in one display window from an external perspective using a cloned display window with another three-dimensional camera from an overhead position.

20 An example of a computer console display 100 useful for displaying a three-dimensional rendering of a structure is shown in Fig. 7. The display 100 comprises a first window 101 for displaying a volume rendered image of the structure and a second window 102 for displaying a surface rendered image of the structure. Alternatively, the second window 102 can display a surface rendered image of the structure embedded within a volume rendered display, as described above. In addition, three multiplanar windows, 103, 104, and 105, are provided in a third

window for displaying axial, coronal, sagittal, or oblique two-dimensional slices through the structure at a user-defined point, or at the centroid of a chosen population.

Alternatively a single window display 200, as  
5 shown in Fig. 9, can be used to display a three-dimensional rendering of the structure. The single window display comprises a single three-dimensional display window for presenting a combination of  
10 multiplanar images 203, 204 and 205 with a volume-rendered image 207 centered on a point located within a surface-rendered image 209. The display presents a holistic view of all the data that can aid in the visualization and understanding of the inter-relationships of the various rendering techniques  
15 (i.e., surface rendering, volume rendering, and intersecting two-dimensional planes). The various rendering techniques can exist together because they are all based on the same patient coordinate system supplied by the image scanner, and they are all  
20 rendered using shared three-dimensional graphics techniques (texture memory) and a common graphics library. The intersecting planes can be rendered as opaque textures (as opposed to semi-transparent textures used in volume rendering) mapped onto two-  
25 dimensional rectangles using texture mapping and drawn in their proper orientation. The user can interactively scroll through slices parallel to any of the intersecting planes and can view any combination of planes (e.g., axial and/or sagittal and/or coronal  
30 planes), or the user can create and view an oblique slice plane. The planes can be rendered together with the surface data to show the exact relationship between the wireframe model and the volume (by viewing the intersections and orientations of the surface  
35 rendered wireframe model and the two-dimensional slices). They can be viewed together because the




- 35 -

planes are rendered as any other kind of surface (i.e., a flat, two-dimensional rectangle).

It will be recognised by those skilled in the art that changes or modifications may be made to the above-described embodiments without departing from the broad inventive  
5 concepts of the invention. It should therefore be understood that this invention is not limited to the particular embodiments described herein, but it intended to include all changes and modifications that are within the scope and spirit of the invention as set forth in the claims.

10



- 36 -

The claims defining the present invention are as follows:

1. A computer-implemented method for interactively displaying a three-dimensional rendering of a structure having a lumen and indicating regions of abnormal wall thickness comprising the steps of:
  - 5 a. forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with the three-dimensional structure;
  - b. creating an isosurface of a selected region of interest from the three-dimensional volume of data based on a selected value of the physical property representing the selected
  - 10 region of interest;
  - c. generating a wireframe model of the isosurface, the wireframe model comprising a plurality of vertices;
  - d. grouping the vertices of the wireframe model into populations having a characteristic indicating abnormal wall structure; and
  - 15 e. rendering the wireframe model in an interactive three-dimensional display to indicate the populations.
2. The method as recited in claim 1 wherein the step of grouping the vertices into populations comprises the steps of:
  - 20 a. determining a normal vector for each vertex position;
  - b. determining a wall thickness value associated with each normal vector for each vertex;
  - c. determining a connectivity matrix of contiguous vertices for each vertex; and
  - d. grouping contiguous vertices having a characteristic indicating abnormal
  - 25 thicknesses into separate populations of abnormal thickness.
3. The method as recited in claim 2 wherein the step of determining the connectivity matrix comprises the step of re-ordering the connectivity matrix using local geometry connectivity information.

30



- 37 -

4. The method as recited in claim 1 further comprising the step of analyzing each population according to selected shape characteristics.

5. The method as recited in claim 4 wherein the step of analyzing each population according to shape characteristics comprises the step of determining a convexity value for each population representing an amount and direction of curvature.

6. The method as recited in claim 4 wherein the step of analyzing each population according to shape comprises the step of determining a curvature for each population.



10

7. A method for interactively displaying a three-dimensional rendering of a structure having a lumen comprising the steps of:



15

a. forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with the three-dimensional structure;

b. segmenting a selected region of interest from the three-dimensional volume of data based on a threshold value of the physical property, wherein the threshold value is adaptively adjusted in the region of interest;

20 c. creating an isosurface of a selected region of interest from the three-dimensional volume of data based on selected values of the physical property representing the selected region of interest;

d. generating a wireframe model of the isosurface; and

e. rendering the wireframe model in an interactive three-dimensional display.

25 8. A system for interactively displaying a three-dimensional rendering of a structure having a lumen and indicating regions of abnormal wall thickness comprising:

a. volume formation means for forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with the three-dimensional structure;





- 38 -

- b. isosurface creation means for creating an isosurface of a selected region of interest from the three-dimensional volume of data based on a selected value of the physical property representing the selected region of interest;
- c. wireframe generation means for generating a wireframe model of the isosurface,
- 5 the wireframe model comprising a plurality of vertices;
- d. vertex grouping means for grouping the vertices of the wireframe model into populations having abnormal wall structure; and
- e. rendering means for rendering the wireframe model in an interactive three-dimensional display.
- 10
9. A system for interactively displaying a three-dimensional rendering of a structure having a lumen and indicating regions of abnormal wall thickness comprising:
- a. formation means for forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with the
- 15 three-dimensional structure;
- b. segmentation means for segmenting a selected region of interest from the three-dimensional volume of data based on a threshold value of the physical property, wherein the threshold value is adaptively adjusted;
- c. isosurface creation means for creating an isosurface of a selected region of interest
- 20 from the three-dimensional volume of data based on selected values of the physical property representing the selected region of interest;
- d. wireframe generation means for generating a wireframe model of the isosurface, the wireframe model comprising a plurality of vertices; and
- e. rendering means for rendering the wireframe model in an interactive three-
- 25 dimensional display.
10. The method as recited in claim 1 wherein the rendering step comprises splitting the structure open in lengthwise sections and displaying the split open structure so that inner surfaces of the split open structure are visible.



- 39 -

11. The method as recited in claim 7 wherein the rendering step comprises splitting the structure open in lengthwise sections and displaying the split open structure so that inner surfaces of the split open structure are visible.

5 12. The system as recited in claim 8 wherein the rendering means comprises means for splitting the structure open in lengthwise sections and displaying the split open structure so that inner surfaces of the split open structure are visible.

10 13. The system as recited in claim 9 wherein the rendering means comprises means for splitting the structure open in lengthwise sections and displaying the split open structure so that inner surfaces of the split open structure are visible.

14. The method as recited in claim 1 wherein the rendering step comprises simulating movement along a line which passes along the center of the lumen of the structure.

15 15. The method as recited in claim 7 wherein the rendering step comprises simulating movement along a line which passes along the center of the lumen of the structure.

20 16. The system as recited in claim 8 wherein the rendering means comprises means for simulating movement along a line which passes along the center of the lumen of the structure.

25 17. The system as recited in claim 9 wherein the rendering means comprises means for simulating movement along a line which passes along the center of the lumen of the structure.

18. The method as recited in claim 1 comprising the step of displaying a volume-rendered image of the interactive three-dimensional display centered on a point located within a surface-rendered image of the interactive three-dimensional display.




- 40 -

19. The method as recited in claim 18 wherein the step of displaying the interactive three-dimensional display comprises the step of displaying at least one planar image through a second point located within the surface-rendered image of the interactive three-dimensional display.

5

20. The method as recited in claim 7 comprising the step of displaying a volume-rendered image of the interactive three-dimensional display centered on a point located within a surface-rendered image of the interactive three-dimensional display.



10 21. The method as recited in claim 20 wherein the step of displaying the interactive three-dimensional display comprises the step of displaying at least one planar image through a second point located within the surface-rendered image of the interactive three-dimensional display.



15 22. The system as recited in claim 8 comprising means for displaying a volume-rendered image of the interactive three-dimensional display centered on a point located within a surface-rendered image of the interactive three-dimensional display.

20 23. The system as recited in claim 22 wherein the display means comprises means for displaying at least one planar image through a second point located within the surface-rendered image of the interactive three-dimensional display.

24. The system as recited in claim 9 comprising means for displaying a volume-rendered image of the interactive three-dimensional display centered on a point located  
25 within a surface-rendered image of the interactive three-dimensional display.

25. The system as recited in claim 24 wherein the display means comprises means for displaying at least one planar image through a second point located within the surface-rendered image of the interactive three-dimensional display.



- 41 -

26. A method for interactively displaying three dimensional structures comprising the steps of:

- a. forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with a three dimensional body;
- b. segmenting a selected region of interest from the volume of data based on selected values of the physical property representing the selected region of interest;
- c. rendering the segmented region of interest as a surface rendered image in an interactive three-dimensional display, therein producing a virtual three-dimensional environment; and
- d. displaying a volume-rendered image of the interactive three-dimensional display adjoining the surface-rendered image.

27. The method as recited in claim 26 wherein the step of displaying the interactive three-dimensional display comprises the step of displaying at least one planar image through the surface-rendered image of the interactive three-dimensional display.

28. A method for interactively displaying three dimensional structures comprising the steps of:

- a. forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with a three dimensional body;
- b. segmenting a selected region of interest from the volume of data based on selected values of the physical property representing the selected region of interest;
- c. determining an arbitrarily oriented cross-sectional area of the selected region of interest; and
- d. rendering the segmented region of interest in an interactive three-dimensional display, therein producing a virtual three-dimensional environment.

29. A method for interactively displaying three dimensional structures comprising the steps of:



- 42 -

- a. forming a three-dimensional volume of data from a series of two-dimensional images representing at least one physical property associated with a three dimensional body;
- b. segmenting a selected region of interest from the volume of data based on selected values of the physical property representing the selected region of interest;
- c. generating a wireframe model of the segmented region of interest, wherein the wireframe model comprises a plurality of vertices and information regarding the connectivity of the plurality of vertices is provided by connectivity matrices;
- d. re-ordering the connectivity matrices; and
- 10 e. rendering the segmented region of interest in an interactive three-dimensional display, therein producing a virtual three-dimensional environment.
- 30 The method as recited in claim 29 comprising the step of determining an arbitrarily oriented cross-sectional area of the selected region of interest.

15

DATED this 17th day of June 2002

20 WAKE FOREST UNIVERSITY  
By Their Patent Attorneys  
DAVIES COLLISON CAVE



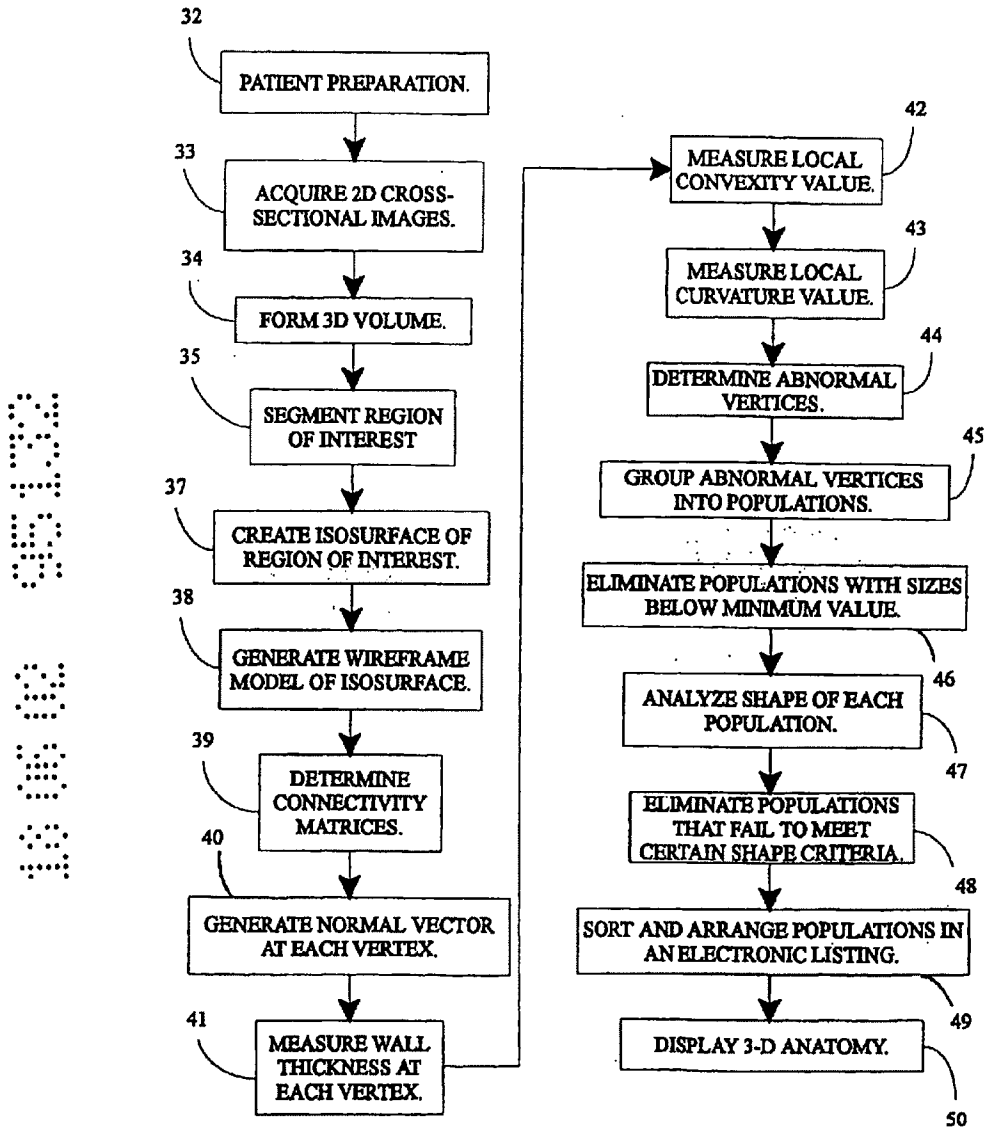
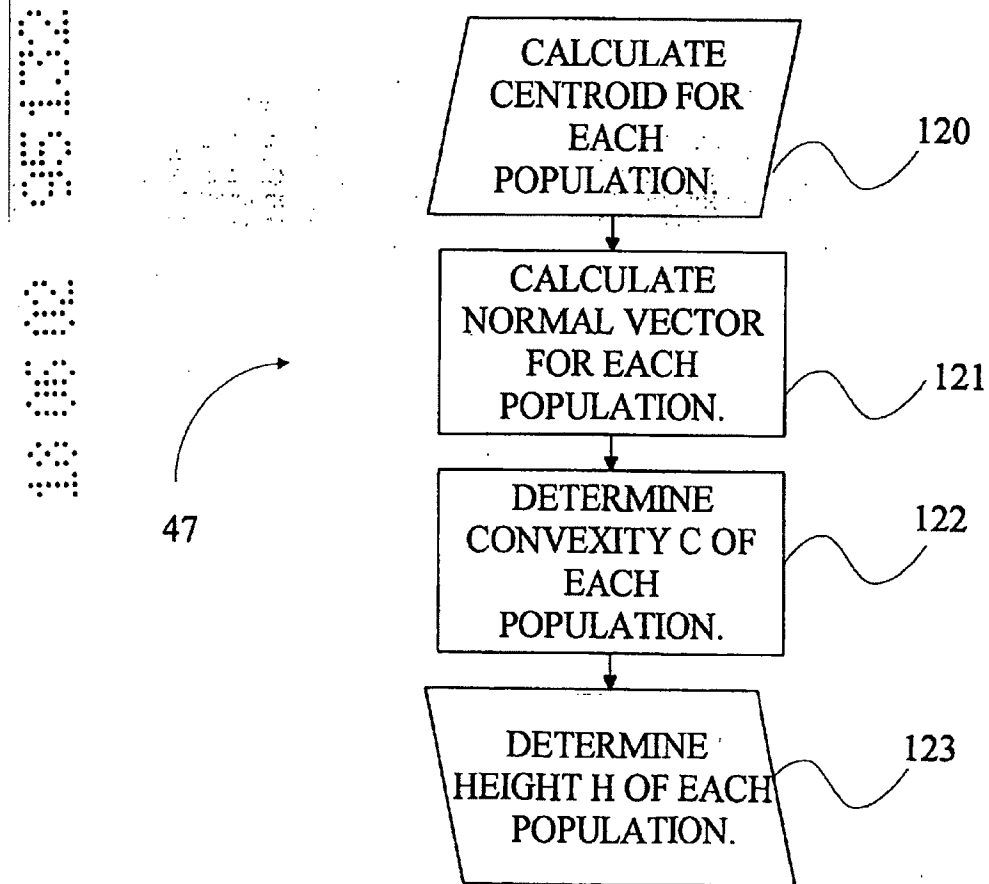


FIG. 1

FIG. 2



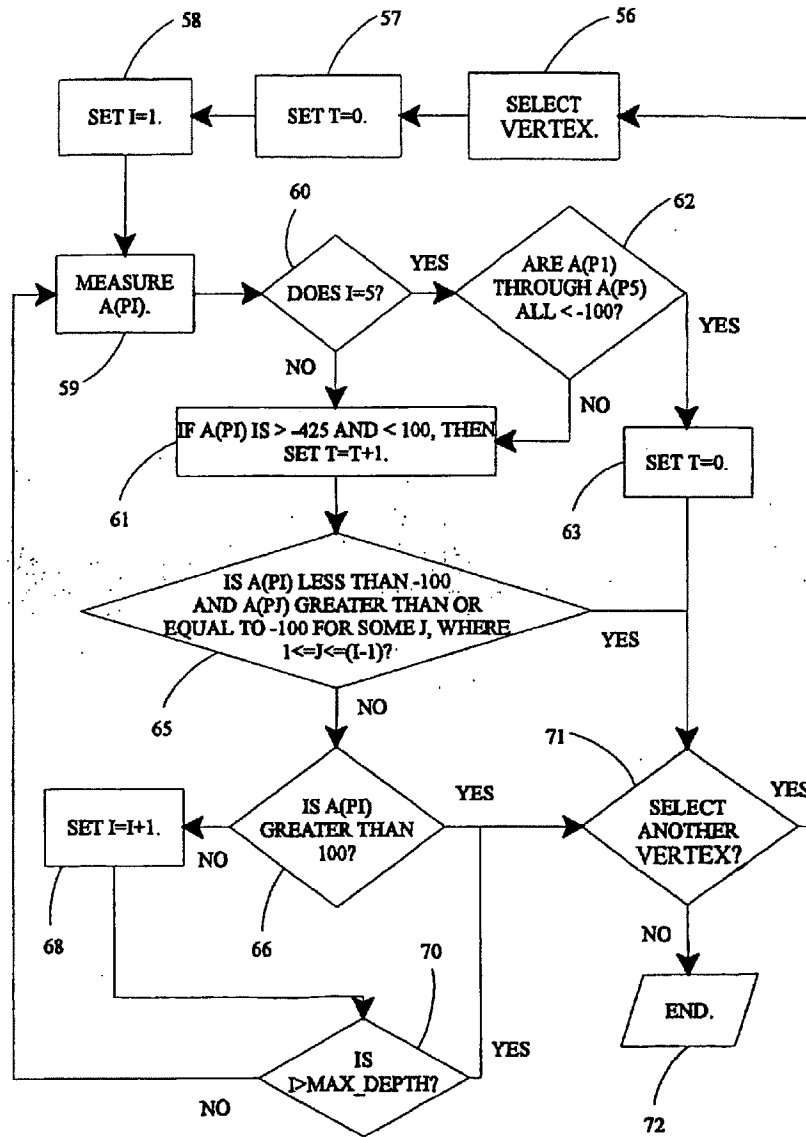


FIG. 3



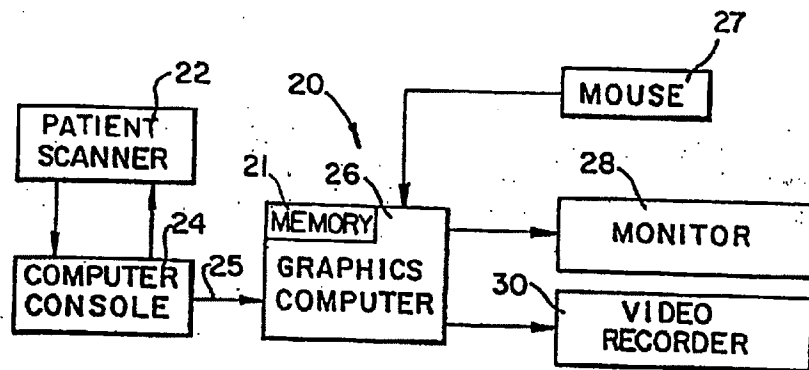
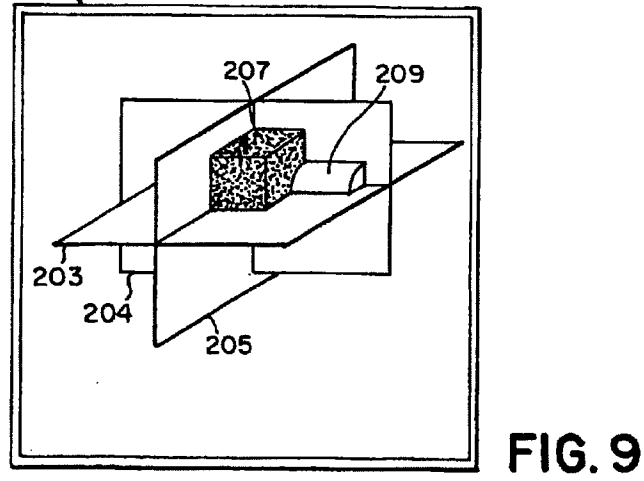
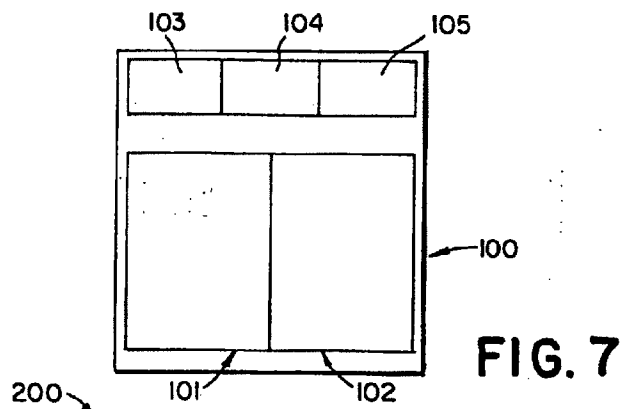
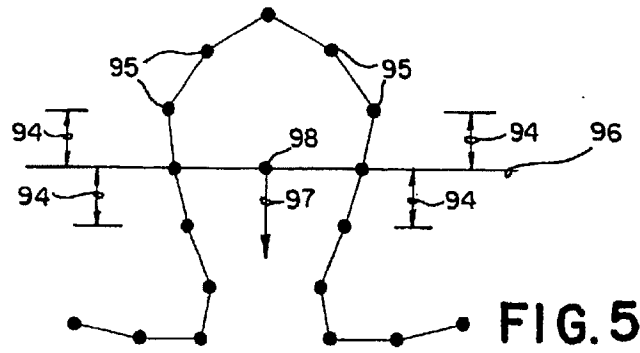


FIG. 4



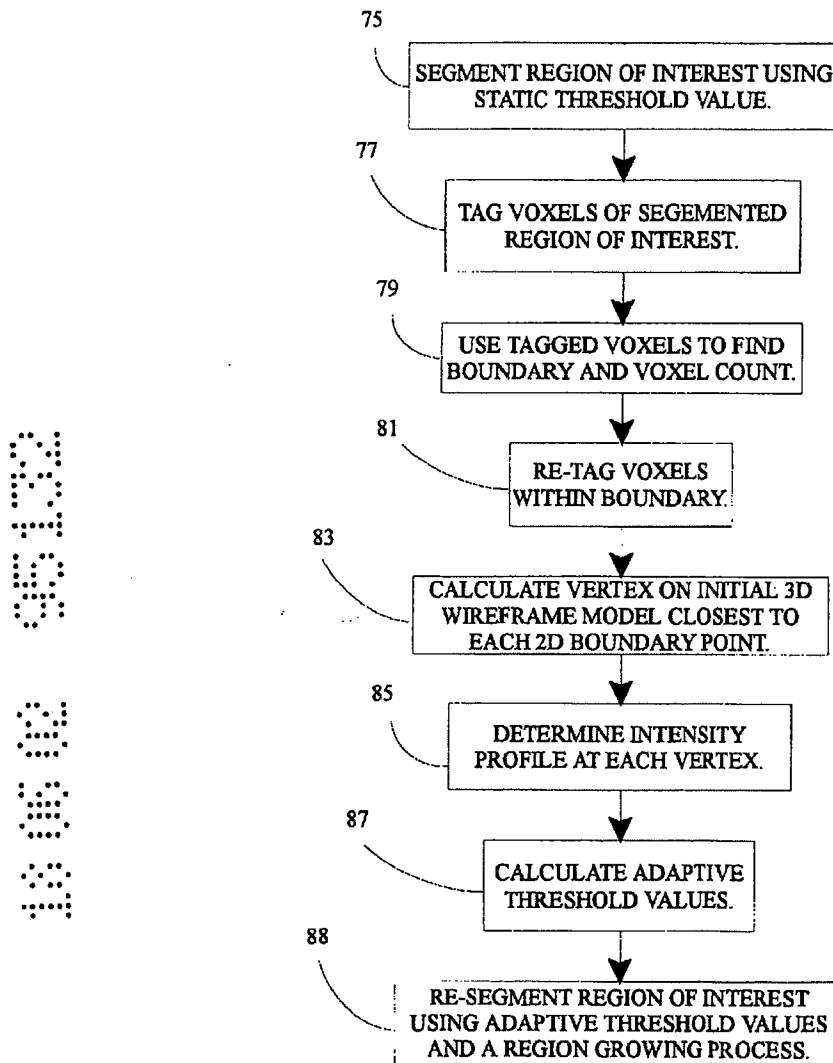


FIG. 6



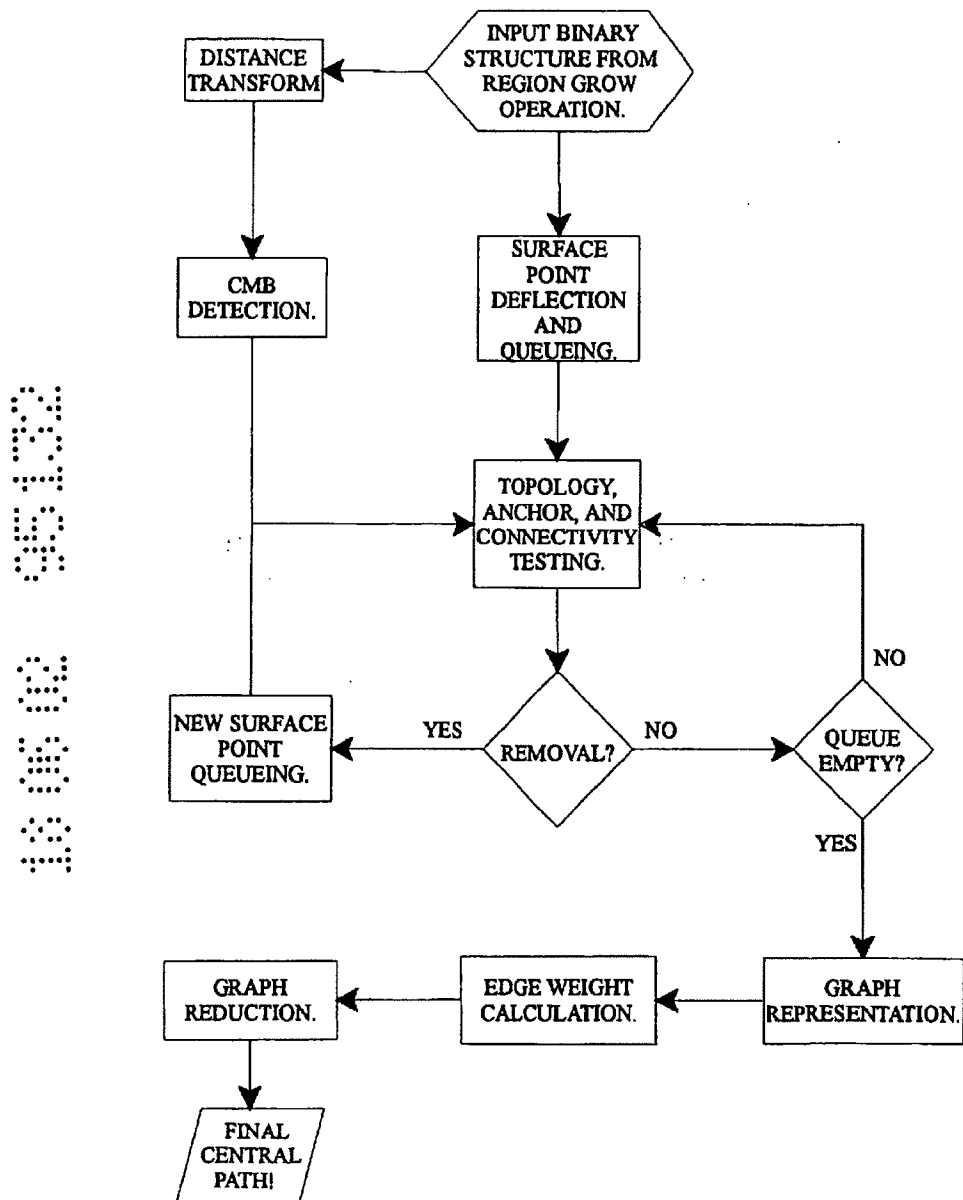


FIG. 8


**FIG. 10a**




**FIG. 10b**

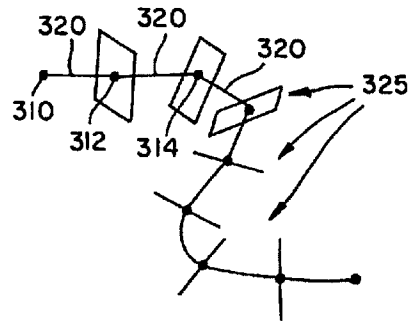

**FIG. 10c**

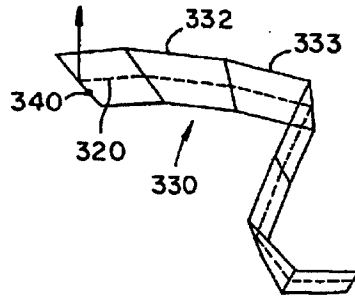

**FIG. 10d**



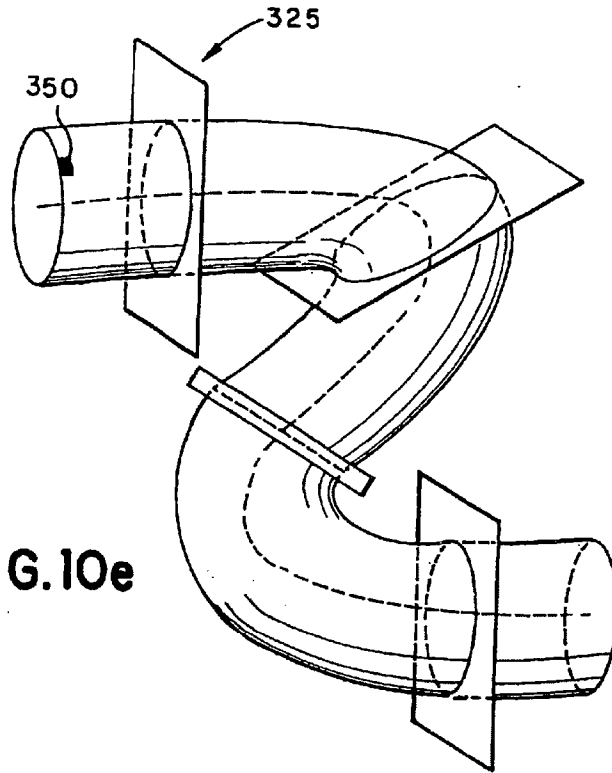


FIG. 10e

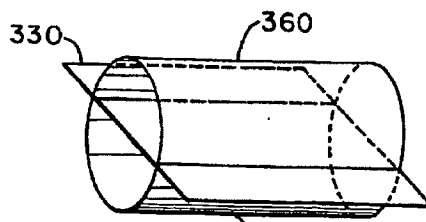


FIG. 10f

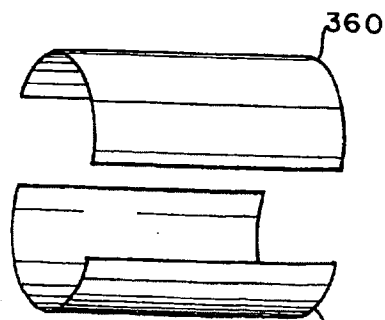


FIG. 10g

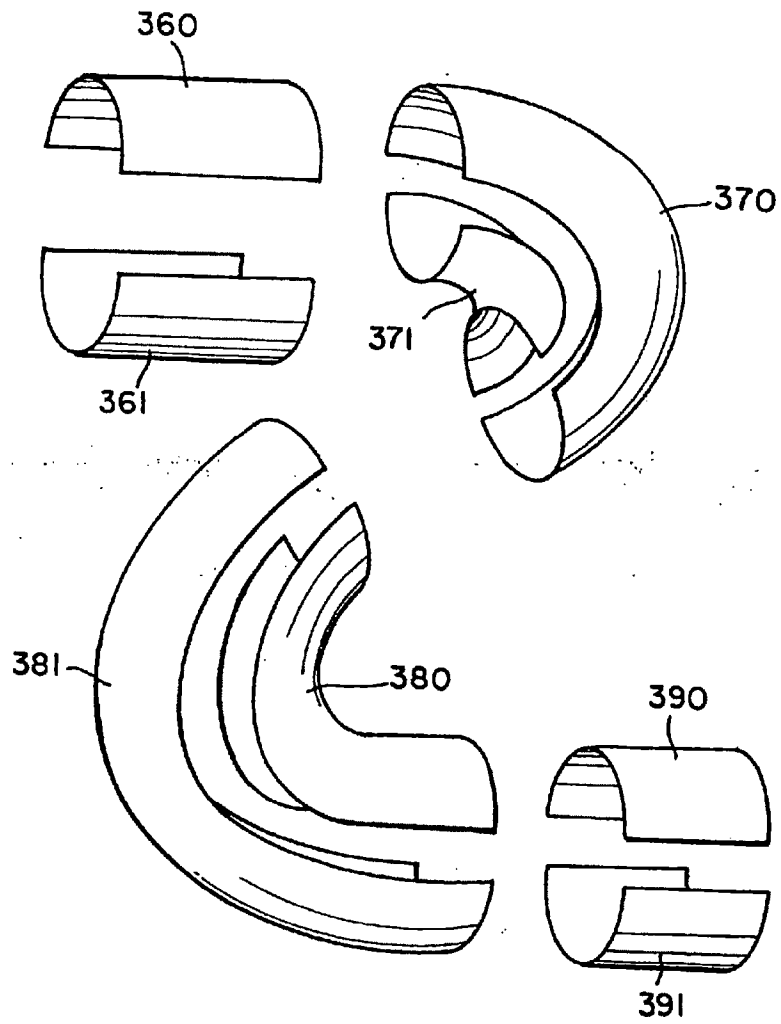


FIG. 10h